US006655293B1

(12) **United States Patent**
Henry et al.

(10) **Patent No.: US 6,655,293 B1**
(45) **Date of Patent: Dec. 2, 2003**

(54) **FIN-STABILIZED AMMUNITION**

(75) Inventors: **Guy H. Henry**, Mount Vernon, IL (US); **Donald E. Dillard**, Murphysboro, IL (US); **Rao Yalamanchili**, Flanders, NJ (US); **Dennis J. Conway**, East Stroudsburg, PA (US); **Rick D. Wright**, Herrin, IL (US); **Gary C. Fleming**, Budd Lake, NJ (US); **Alan N. Cohen**, Wharton, NJ (US); **Roger E. Joinson**, Boonton, NJ (US); **Gene Venable**, Sparta, NJ (US); **Thomas Doris**, Sparta, NJ (US); **Albert S. Tatka, Jr.**, Wantage, NJ (US)

(73) Assignee: **General Dynamics Ordnance and Tactical Systems, Inc.**, St. Petersburg, FL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/804,001**

(22) Filed: **Mar. 12, 2001**

Related U.S. Application Data

(60) Provisional application No. 60/214,901, filed on Jun. 29, 2000.

(51) **Int. Cl.**[7] **F42B 5/02**; F42B 10/06; F42B 12/42

(52) **U.S. Cl.** **102/439**; 102/513; 102/521; 244/3.23; 244/3.3

(58) **Field of Search** 102/439, 513, 102/521, 523; 244/3.23–3.3

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,851,590	A *	12/1974	La Costa	102/501
3,902,424	A	9/1975	Dietsch et al.	102/87
4,520,972	A *	6/1985	Diesinger et al.	244/3.24
4,653,405	A *	3/1987	Paine	102/3.29
4,815,682	A	3/1989	Feldmann et al.	244/3.23
4,901,646	A	2/1990	Feldmann et al.	102/521
5,297,492	A	3/1994	Buc	102/521
5,413,049	A *	5/1995	Feldmann et al.	102/521
5,472,536	A	12/1995	Doris et al.	149/41
5,811,724	A	9/1998	Henry, III et al.	149/18

FOREIGN PATENT DOCUMENTS

DE	3927918	*	2/1991	244/3.24

OTHER PUBLICATIONS

"25–mm M242 Bushmaster", US Naval Institute Military Database, http://www.usni.com/demo/weapons/artguns/cmbtveh/w0003600.html, downloaded Mar. 7, 2000.

* cited by examiner

Primary Examiner—Harold J. Tudor
(74) *Attorney, Agent, or Firm*—Wiggin & Dana LLP; Gregory S. Rosenblatt; Alberta A. Vitale

(57) **ABSTRACT**

Tracer visibility of APFSDS projectiles can be enhanced through a combination of increased steady state spin rate, reduced muzzle obscuration, and optimized airflow over the stabilizing fin geometry of the sub-projectile. The preferred means to increase steady state spin rates of the sub-projectile is to incline or deflect the fin blade tip portion, creating a larger, hotter burning, tracer plume.

14 Claims, 5 Drawing Sheets

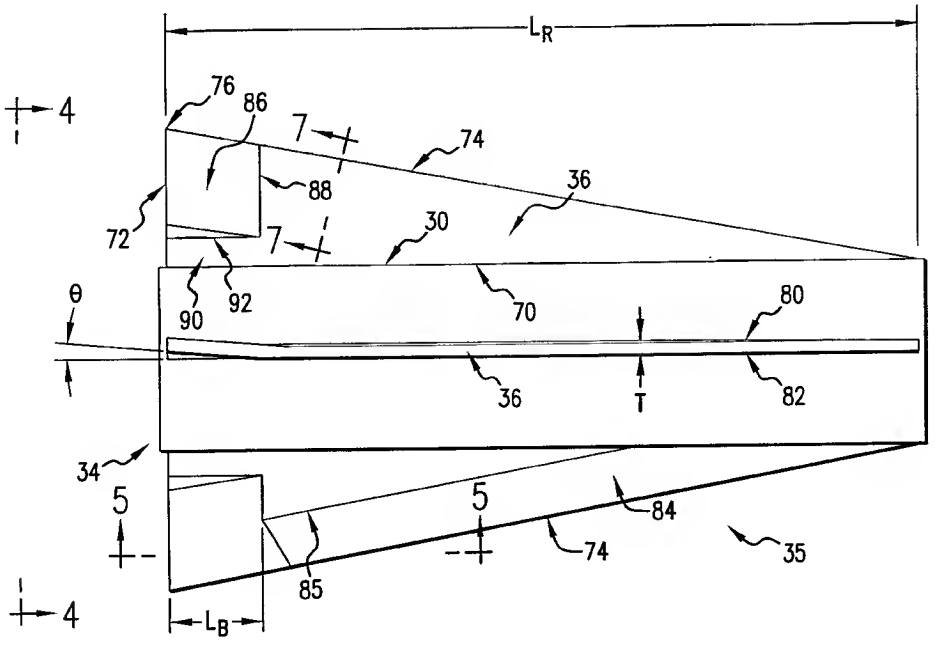

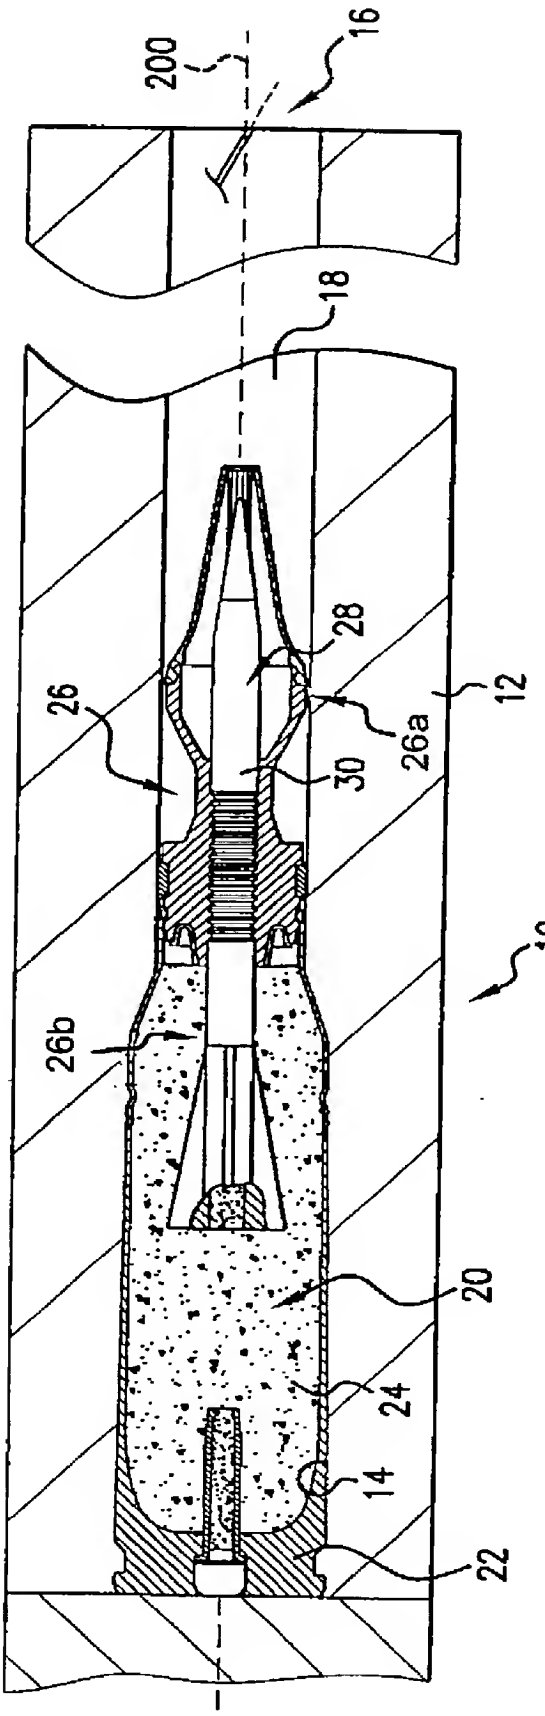

FIG. 1

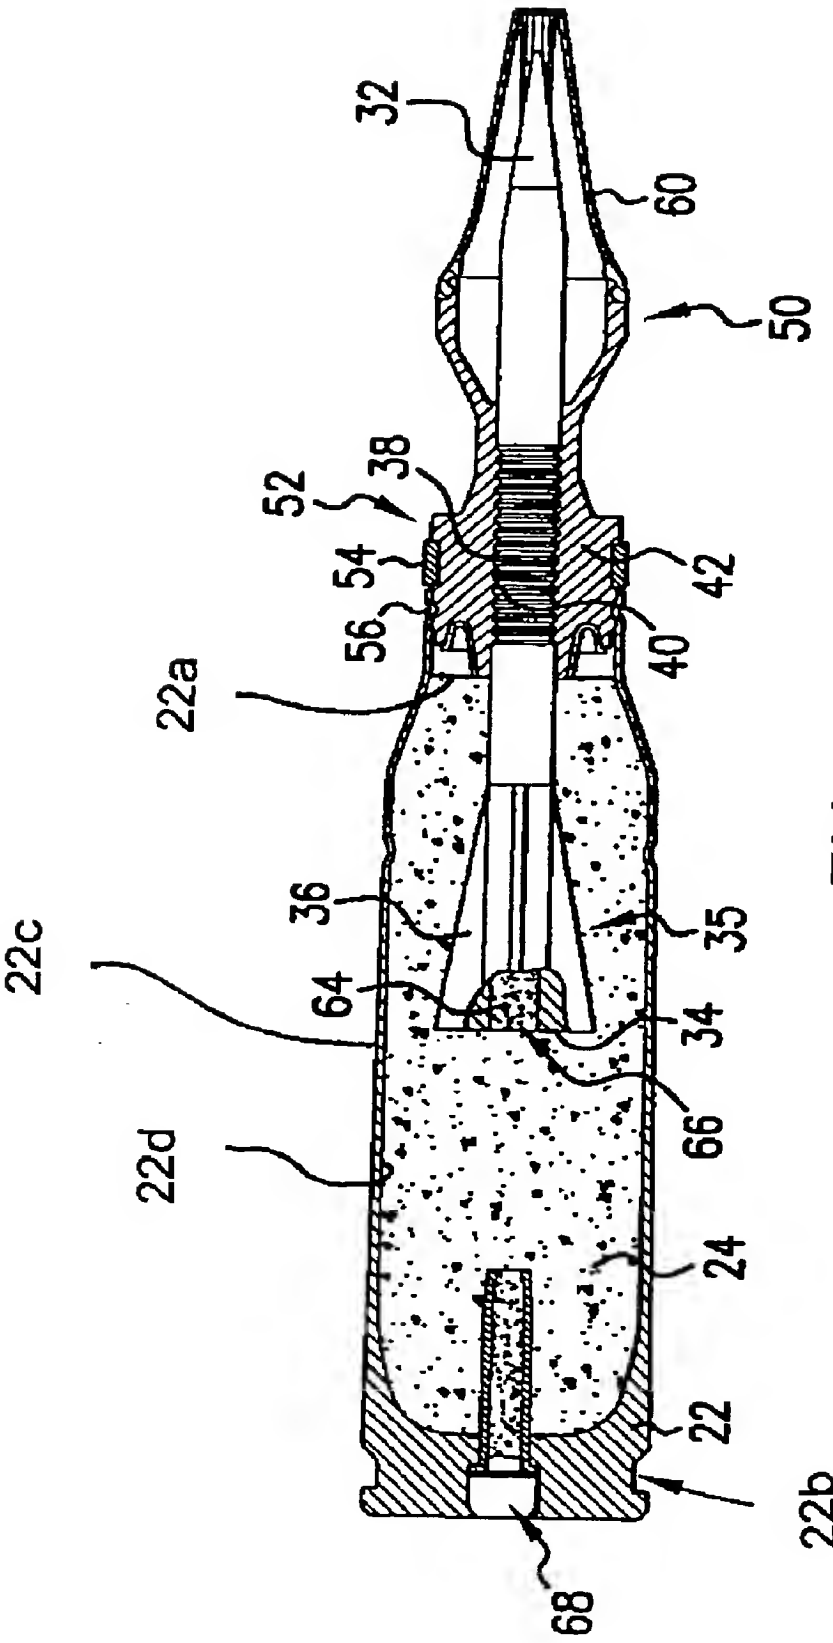

FIG.2

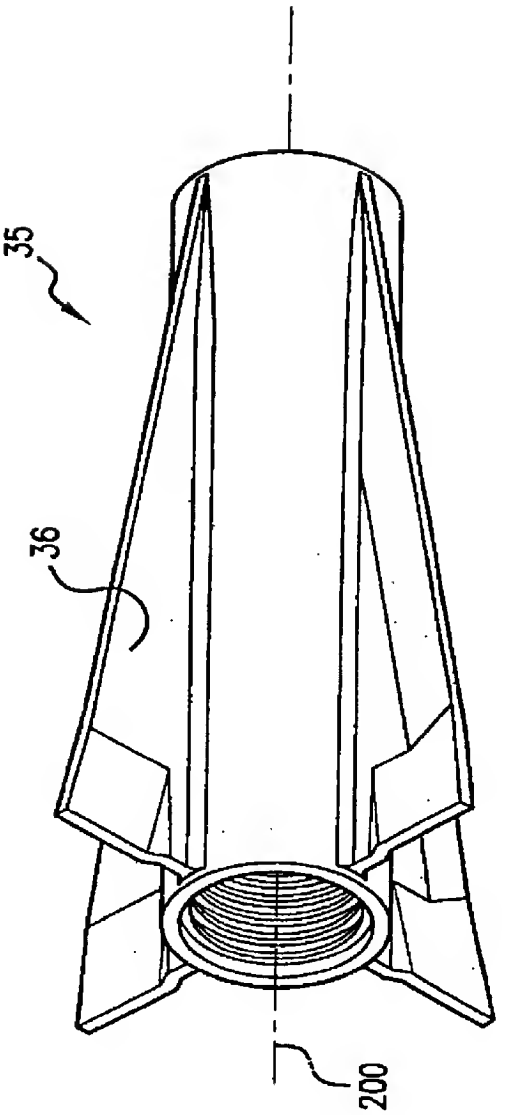

FIG.3

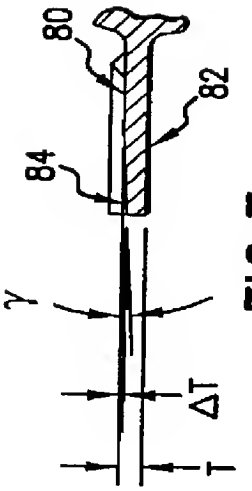

FIG.7

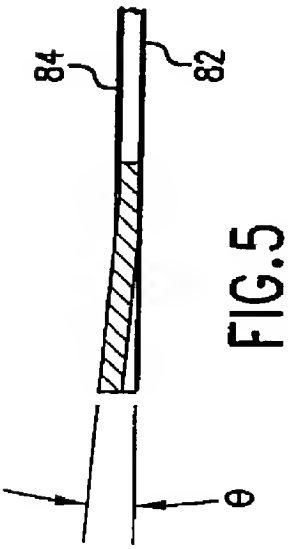

FIG.5

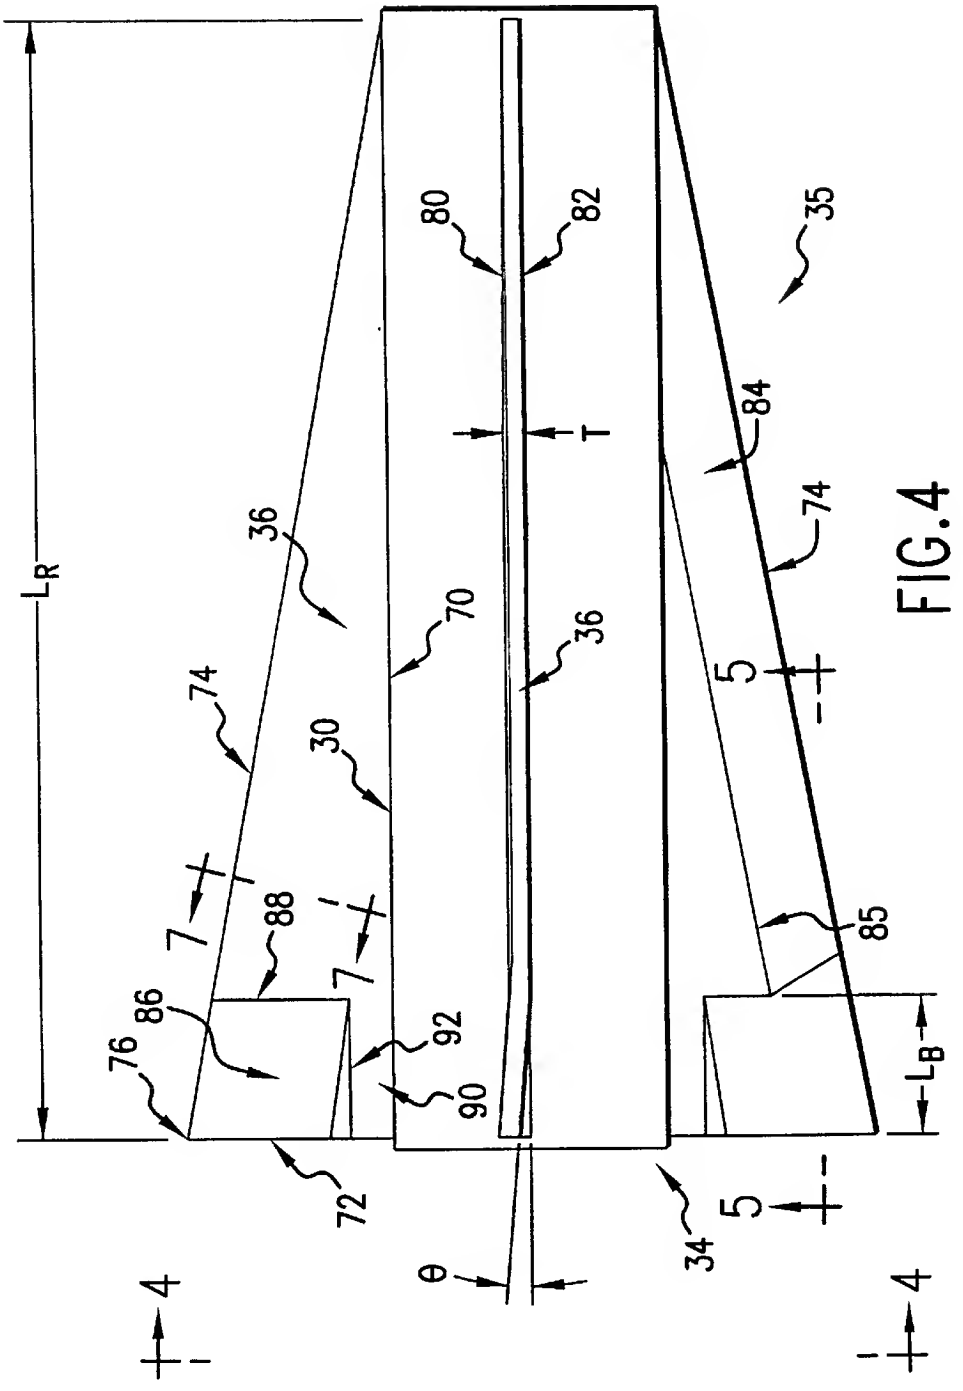

FIG. 4

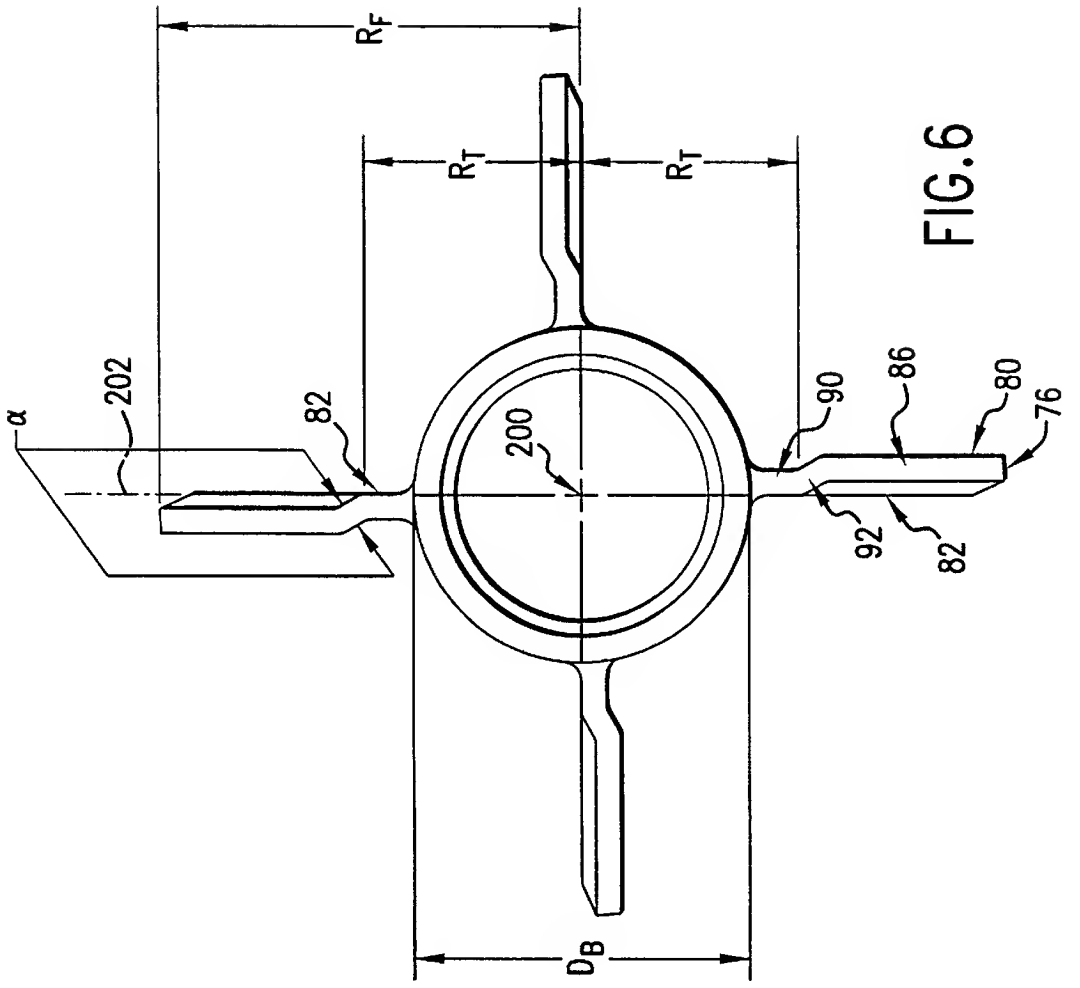

FIG.6

FIN-STABILIZED AMMUNITION

CROSS-REFERENCE TO RELATED APPLICATION

This patent application claims priority of U.S. Provisional Patent Application Serial No. 60/214,901 entitled "FIN-STABILIZED AMMUNITION" that was filed on Jun. 29, 2000.

U.S. GOVERNMENT RIGHTS

The U.S. Government has certain rights to this invention, pursuant to contract number DAAE30-97-C-1088 awarded by the Department of the Army.

BACKGROUND OF THE INVENTION

(1) Field of the Invention

This invention relates to fin-stabilized ammunition, and more particularly to armor-piercing fin-stabilized discarding sabot with tracer (APFSDS-T) ammunition.

(2) Description of the Related Art

There exists a well-developed art in the field of APFSDS (including, inter alia, APFSDS-T (with tracer)) ammunition. APFSDS rounds have been developed for both rifled and smoothbore barrels (tubes). A rifled barrel or tube functions to spin-stabilize a projectile encased in the sabot, a principle utilized in weapons from handguns to large naval guns. A projectile exiting the muzzle of a rifled tube typically has a relatively high spin rate. This rifling-induced spin rate is nominally equal to the product of the muzzle velocity (longitudinal) and the rifling pitch (measured in turns or revolutions per linear dimension) at the muzzle. An exemplary 105 mm rifled tube has a 1–18 twist, meaning the longitudinal distance the rifling travels downbore to make one complete revolution is eighteen times the caliber of the barrel. Thus, the exemplary pitch is one turn per 1.89 meters. With an exemplary muzzle velocity of from about 1,375 to about 1,650 meters per second, the associated spin rate will be from about 730 to about 870 revolutions per second (rps). Such a spin rate would adversely affect the performance of an APFSDS round as, once the projectile (also occasionally designated "sub-projectile") is free of the sabot, it relies on its aerodynamic for stability at a relatively low spin rate. The rapid angular deceleration from the rifling-induced spin rate to the preferred low spin rate may: (a) damage the sub-projectile; (b) require a weight penalty associated with providing particularly robust fins to avoid damage; and/or (c) induce wobble or other forms of instability.

Common APFSDS rounds for rifled tubes decouple rotation of the projectile from rotation induced by the rifling by providing the sabot with a "slip obturator" mounted on the sabot body in such a way as to allow the obturator to rotate about the longitudinal axis of the sabot. The obturator engages the tube bore, accommodating to the rifling and forming a seal to retain propellant gases behind the obturator. Because of its accommodation to the rifling, the obturator acquires the rifling-induced spin rate described above. With a slip obturator, this spin rate, however, is not entirely translated to the combination of the sabot body and sub-projectile. The sabot/projectile combination typically has sufficient moment of inertia about the longitudinal axis to overcome the static frictional force along the annular engagement between the obturator and sabot body to allow rotation of the obturator relative to the sabot body. Thus, the sabot body and projectile spin at a rate less than the obturator. A properly designed slip obturator results in a

projectile spin rate which is a small percentage of the rifling-induced spin rate. Once the projectile is free of the sabot, it relies on its aerodynamic fins for stability as a means to maintain relatively low spin rate (e.g., about 70 revolutions per second (rps)). This is accomplished by the torque applied to the sub-projectile created by the aerodynamic force of airflow over its fin blades. Typically fin blades are chamfered, canted, or deflected in such a manner that the airflow over the projectile creates a rotational force on any forward-facing projected areas of the fin blades. Commonly APFSDS rounds are spun at low rates to normalize any physical imbalances and/or aerodynamic forces that they would be subjected to while in flight to the target.

In the subfield of medium caliber ammunition (e.g., nominal caliber 20 mm to 60 mm), APFSDS-T ammunition has also been developed. A key example is the 25 mm M919 round used by the 25 mm M242 Bushmaster automatic gun of the U.S. Army M2/M3 Bradley Fighting Vehicle (BFV). When fired from the 2.003 m long barrel of the M242, the M919 projectile has an exemplary muzzle velocity of about 1385 m/s at ambient conditions and, more broadly between about 1345 m/s and about 1400 m/s at the round's required temperature extremes. The projectile has an effective range in excess of 1500 m. With a gain twist barrel of a groove-to-groove diameter of 26.0 mm, a land-to-land diameter of 25.0–25.1 mm and a 7.5 degree twist at the muzzle, a full spin projectile would leave the muzzle with a theoretical spin rate of about 2320 rps at the exemplary 1385 m/s muzzle velocity. The effect of a slip obturator is to substantially reduce the muzzle spin rate of the projectile (e.g., to about 15–50 percent, or more particularly about 25 percent of the theoretical value).

After exiting the barrel and discarding the sabot, the projectile spin rate decays further, initially quite sharply and then more gradually, eventually approximating a steady state condition (see, U.S. Pat. No. 4,815,682 of Feldmann et al.). For consistency herein, where a numerical value is given, the steady state spin rate (SSSR) is defined as the spin rate of the projectile one second after exiting the muzzle when fired at a minimal angle of elevation under standard conditions.

Tracer visibility is critical to a weapon operator as it should allow the operator to follow the projectile flight path to permit the operator to re-aim the weapon to hit a desired target. In such small size, high velocity, long range rounds as the M919, tracer visibility has been a significant problem (see, U.S. Pat. No. 5,472,536 of Doris et al. which discloses improved visibility tracer compositions). An operator, utilizing the sighting systems of the weapon firing such a round may have a hard time acquiring the tracer in the sights and maintaining sight of the tracer.

BRIEF SUMMARY OF THE INVENTION

Accordingly, in one aspect, the invention is directed to an ammunition cartridge including a case, a saboted projectile, and a propellant charge in the case interior. The projectile includes a body having a nose and tail, a tracer mounted within the body, and a plurality of stabilizing fin blades projecting from the body. The sabot secures the projectile body to the case proximate the case mouth. The blades each have first surface portions inclined relative to a longitudinal direction by an angle of between about 3.5 and about 6.0 degrees.

In various implementations of the invention, the propellant charge may be effective to propel the projectile at a muzzle velocity of between 1300 and 1500 m/s. The angle

may be effective to provide the projectile with a steady state spin rate of at least 340 rps at such muzzle velocity. The blades may be formed as flat plates and may be triangular in planform. The sabot may be dimensioned to fire the projectile from a barrel having a nominal caliber between 20 and 120 mm, more narrowly between 20 and 50 mm, and most particularly 25 mm.

In another aspect the invention is directed to a fin-stabilized discarding sabot projectile wherein at least two of the fin blades are formed having a root portion extending longitudinally. A second portion, outboard of the root portion, has a first subportion extending longitudinally and a second subportion aft of the first subportion and inclined relative thereto by an angle of between about 3.5 and about 6.0 degrees.

In various implementations of the invention, the projectile may have a tracer. There may be exactly four such blades. The angle may be between 4.3 and 5.2 degrees. The second subportion may extend to a tip of the associated blade. The second subportion may have a planform area of 10–30 percent of a blade planform area. The root portion may have a radial span of 15–30 percent of a blade radial span.

In another aspect, the invention is directed to a fin-stabilized discarding sabot with tracer projectile where at least two tail fin blades are formed having a portion extending by an angle relative to a longitudinal direction. The angle is effective to impart the projectile with a steady state spin rate (SSSR) within upper and lower limits as a function of caliber (C) respectively defined by the equations:

$$(SSSR\text{-}340)/(C\text{-}25)=(99\text{-}SSSR)/(120\text{-}C);$$

and

$$(SSSR\text{-}420)/(C\text{-}25)=(122\text{-}SSSR)/(120\text{-}C).$$

In various implementations of the invention, there may be exactly four such blades, the angle may be between 4.3 and 5.2 degrees, and the projectile may have a caliber between 13 and 30 mm.

In another aspect, the invention is directed to a fin-stabilized discarding sabot with tracer projectile for firing from a barreled weapon of nominal 25 mm caliber wherein the projectile achieves a steady state spin rate (SSSR) of at least 340 rps. In various implementations of the invention, the SSSR may be between 340 and 420 rps, the muzzle velocity may be between 1300 and 1500 m/s and the projectile may have a muzzle spin rate higher than the SSSR but lower than an intervening peak spin rate.

In another aspect, the invention is directed to reengineering the configuration of a fin-stabilized discarding sabot with tracer projectile from an initial condition to an improved condition wherein in the improved condition the projectile has an increased steady state spin rate and improved tracer visibility.

The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the invention will be apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is a partial cut away longitudinal cross-sectional view of an ammunition round including a saboted projectile according to principles of the invention chambered in a weapon.

FIG. **2** is a longitudinal cross-sectional view of the round of FIG. **1**.

FIG. **3** is a perspective of a tail portion of the projectile of FIGS. **1** and **2**.

FIG. **4** is a side view of a tail portion of the projectile of FIGS. **1** and **2**.

FIG. **5** is a longitudinal cross-sectional view of a fin of the projectile of FIG. **4** taken along line **5**—**5**.

FIG. **6** is a rear view of the projectile of FIG. **4**, taken along line **6**—**6**.

FIG. **7** is a cross-sectional view of the projectile of FIG. **4**, taken along line **7**—**7**.

Like reference numbers and designations in the various drawings indicate like elements.

DETAILED DESCRIPTION

FIG. **1** shows a weapon **10** having a barrel **12** extending from a chamber **14** at the aft end of the barrel **12** to a muzzle **16** formed by a fore end of the barrel. The barrel **12** extends along a central longitudinal axis **200** and has a rifled bore or inner surface **18**. Typically, the rifling has a right hand gain twist as is common for weapons of U.S. manufacture although the invention is amenable to a left hand twist, to constant twist and to smoothbore barrels. The illustrated barrel is shown in highly schematic fashion and is not intended to be a precise depiction of the barrel of any particular weapon.

An ammunition round **20** is provided having a case **22** accommodated within the chamber **14**. The case **22** comprises a sidewall **22***c* that extends from a base **22***b* to a mouth **22***a* bounding an interior **22***d* that is substantially filled with a propellant **24** such as Wimmis EI. A saboted projectile **26** is accommodated within the mouth of the case **22**, an aft portion **26***b* extending into the case **22** and a fore portion **26***a* extending into the barrel **12**. The projectile, shown as a long rod penetrator **28**, includes a body **30** formed primarily of a high-density metal such as tungsten and/or depleted uranium. The body **30** (FIG. **2**) extends from a nose **32** (formed as an aerodynamic ballistic tip) to a tail **34**. The body includes the core of a fin unit **35** proximate the tail. The fin unit **35** bears a plurality of (for example, four) blades **36** extending generally radially outward. Centrally along the body **30**, the penetrator bears interlocking features **38** engageable with mating interlocking features **40** of the sabot **42**. The features **38** and **40** may be formed as screw-like threads or as annular thread-like grooves/protrusions engaged with each other so as to be effective to prevent relative longitudinal movement of the penetrator and sabot.

The sabot **42** is formed in a series of segments or petals. The petals are identical to each other which facilitates a balanced sabot and smooth discard of the sabot. The petals are separated from each other along planar interfaces at equal angles about the axis **200**. The assembled sabot fully encircles a portion of the penetrator body. The sabot includes fore and aft protuberances **50** and **52** dimensioned to cooperate with the bore **18** so as to maintain the projectile substantially centered along the axis **200**. In the exemplary embodiment, the petals, and thus the sabot body, are primarily formed of aluminum. The aft protuberance **52** carries a slip obturator **54** in an annular outward-directed channel and includes a second annular outward-directed channel **56** at which the sabot is crimped into the case neck. The fore protuberance **50** is formed as a scoop and carries a hood or shroud **60**. A tracer charge **64** (e.g., of U.S. Pat. No. 5,472,536 of Doris et al., the disclosure of which is incorporated by reference in its entirety herein) is carried within a cylindrical pocket **66** in an aft section of the projectile. A primer **68** in the head of the case **22** is provided to ignite the

propellant **24** via an intervening flash tube and flash charge. The ignition of the propellant **24** propels the projectile down the barrel and ignites the tracer charge **64**.

FIGS. **3** and **4** show further details of the exemplary blades **36**. These are of a nominal delta configuration, which, with the projectile body **30** being of nominal cylindrical configuration in the tail area, are approximately right triangles in plan, having a long side **70** (FIG. **4**) as a root, a short side **72** as a trailing edge, and a hypotenuse **74** as a leading edge with a blade tip **76** at the junction of the leading and trailing edges. Each blade **36** includes first and second surfaces **80** and **82**, respectively facing counterclockwise and clockwise when viewed from the tail. Extending back from the leading edge **74**, a forward portion **84** of the surface **80**, meets a remainder of the surface **80** along a junction **85**. FIG. **7** shows the surface portion **84** angled by an angle γ relative to the surface **82** when viewed transverse to the blade leading edge. The exemplary angle γ is about 2.5 degrees (more broadly between 1.5 and 3.5 degrees and more preferably 2°45'±30').

FIG. **6** shows the exemplary positioning of the blades **36** so that their surfaces **82** extend approximately radially (i.e., they lie in an associated radial plane **202** extending from the axis **200**). The surfaces **80** are, accordingly, offset from that radial plane. A portion **86** proximate the fin tip **76** is deflected relative to the remainder of the fin. The portion **86** is deflected along an approximately radial transition line **88** (FIG. an angle θ. The transition line **88** is very close to radial along the surface **82** but along the surface **80** is radial until reaching the angled surface **84** whereupon it extends closer to normal to the fin leading edge. As discussed in further detail below, the deflected portion **86** advantageously only extends for a portion of the distance from the tip **76** to the body **30**. An undeflected root portion **90** extends from the body **30** to a short transition region **92** between the root portion and the deflected portion **86**. In the exemplary embodiment the root extends longitudinally. Small, relatively insubstantial deviations, (e.g., under two degrees and, preferably well under one degree) should also be possible.

An exemplary method of manufacture for the fin unit **35** involves injection molding of a stainless steel powder-filled polymer followed by sintering to remove the polymer and provide the fin unit with a straight bladed near net shape configuration. Subsequent machining and coining operations provide the internal features and the deflected blade configuration, respectively. An alternative means of producing this fin is to injection mold this part as a net shaped geometry by adjusting the inserts used in the mold to form the detailed profiles of the fin blades.

In the exemplary embodiment of an enhanced M919 projectile, the projectile body has a diameter D_B at blade roots of approximately 0.340 inch. The radius R_F at the blade tip **76** is 0.4265–0.01 inch. An exemplary radius R_T at central portion of the transition region **92** is 0.2425+/–0.013 inch. Thus a root radial span is approximately R_T-0.5 D_B while a deflected portion radial span is approximately R_F–R_T. An exemplary longitudinal span L_B (FIG. **4**) of the fin bent portion from the line **88** to the trailing edge is 0.1720+0.015–0.030 inch. This results in a deflected portion planform area of about 0.204 inch^2 or 20% of the fin planform area. As viewed from the rear, the transition region **92** is angled at an angle α of approximately 30 degrees. A blade root length L_R is 1.401 inches and the blade thickness T is 0.023–0.005 inch. The presence of the angled surface **84** reduces fin thickness at the leading edge by an amount ΔT of less than 0.01 inch (or preferably 0.0045+0.0035 inch). An overall projectile length is about 5.69 inches and an overall mass about 98 g. Such a mass may be achieved via the incorporation of depleted uranium (DU) in the projectile body. If a material of lesser density (e.g., tungsten) is utilized, minor changes in blade configuration may be made to accommodate either for increased projectile body volume, decreased projectile body mass or a combination thereof.

When the basic flat plate prior art configuration is provided with the deflected portions **86**, the torque applied by interaction of the blades with the air is altered. With the exemplary deflection of the blade trailing edge counterclockwise when viewed from the tail, the result is to increase the torque exerted on the projectile about the axis **200** and, thereby, increase the steady state spin rate of the projectile about that axis.

With the exemplary M919 basic flat plate fin blade design, the SSSR was somewhat less than 100 rps. It had been separately observed that an increase in SSSR can ameliorate occasional erratic flight conditions associated with the projectile's spin rate passing through certain resonance frequencies. This is the phenomenon when a sub-projectile's rotational and yawing motions couple, creating a corkscrew motion in the flight projectile about its center of gravity. It was noted that the prior exemplary M919 did in fact exhibit such occasional erratic flight characteristics, degrading its overall lethality. An exemplary angle θ of approximately 2.5 degrees was able to increase the round's SSSR into the range of 100 to 125 rps, thereby extending the flight interval through which the spin rate remained above spin-yaw resonance. Such a projectile has observed spin rates of 435 and 335 rps at 15 and 195 meters downrange respectively. It was later learned that such a spin rate profile was observed not to improve tracer visibility to a preferred level.

It was subsequently observed that with increases in the projectile's SSSR, trace visibility was enhanced. This is believed to be associated with an increase in the radial dispersion of the combustion trail created by the burning tracer material located in the rear of the fin assembly. Trace visibility was determined by the observation of a trace signature by military personnel, seated in the turret of a BFV from which the round was fired. The tracer composition illuminates in both the visible and infrared spectra, allowing use of both daytime visible light and nighttime Forward Looking Infrared (FLIR) modes. Trace visibility is important to the gunner of a BFV as it provides him the ability to adjust aim on target at extended engagement ranges. All trace observations were made while looking through vehicle's integrated sight system (designated Integrated Sight Unit (ISU), national stock number (1240-01-216-6331). This optical system provides laser protection to the soldier, and was operated in both day-clear and FLIR modes. A successful visible trace was one that presented a visible signature to either soldier located in the turret from muzzle to target as one continuous lit image. The exemplary M919 rounds with basic flat plate fins were typically visible only during the last one-third of their trajectories, just as the sub-projectile approached its target. This made it difficult for a BFV gunner to locate and follow the tracer image under battlefield conditions. As trace visibility was gradually enhanced over time, the trace image of the M919 over the first one-third of the round's trajectory became more readily seen, and then the middle-third, completing the visibility of the round over its entire trajectory. As discussed in further detail below, the acquired trace visibility improvements required further changes to the M919 round other than just increasing its SSSR.

With increases in the exemplary angle θ, the corresponding SSSR of the rounds were increased, and visibility

enhancements were observed. Modest visibility enhancements were observed at a corresponding SSSR of 200 rps, while significant visibility enhancements were observed with SSSR above 300 rps. The preferred SSSR value for the enhanced M919 projectile is believed to be between 340 and 420 rps. As in all types of APFSDS rounds, there is an upper boundary in SSSR. It has been observed that when the SSSR of the M919 was allowed to exceed 420 rps, the sub-projectile would randomly experience dynamic flight instabilities in an ever-increasing percentage of rounds as the SSSR was further increased. This degraded the overall lethality of the round (e.g., increased round-by-round dispersion, increased velocity decay, and higher down-range projectile yaw degrading penetration). With the exemplary blade geometry and an angle θ of 4.9 degrees, the enhanced M919 projectile had observed spin rates of 532, 606, and 380 rps at 15 m from the mizzle, 195 m from the mizzle, and one second of flight from the muzzle, respectively. This nominal spin history exhibited no adverse effects on the round's muzzle velocity, velocity decay, or lethality performances. Small changes about the fin's exemplary angle of 4.9 degrees, and corresponding SSSR (e.g., advantageously fewer than 5%, and preferably under 1%) should be tolerable.

In the foregoing example of an enhanced M919 projectile, it is seen how the spin rate of the enhanced sub-projectile might actually temporarily increase during the initial stages of flight after leaving the muzzle. It was however observed that after less than approximately one-half second, the spin rate of the sub-projectile would peak and then begin to decay. With the exemplary geometry of the enhanced M919 fin profile, it has been demonstrated that an angle θ of between 4.3 and 5.2 degrees would provide an SSSR in the preferred range of 340 and 420 rps.

It had also been observed that in addition to increasing the round's SSSR, it became necessary to reduce the amount of muzzle obscuration, cause the tracer to burn hotter, and optimize the air flow over the fin blades to achieve the trace visibility most desired by the soldier. Thus is became a technical challenge to implement all of the above changes in parallel such that there were no degradations in the round's safety and lethality performance characteristics. The soldier is typically unwilling to trade-off performance for improved tracer visibility.

Reduced muzzle obscurations were achieved with the introduction of Nitrochemie EI propellant (Nitrochemie AG, Wimmis Germany) into full-rate production. This required an elaborate ballistic test to demonstrate that all of the M919 round's interior ballistic (e.g., pressure, velocity and action time) and barrel life requirements across the required temperature extremes would be maintained. This is a lower flame temperature propellant of equal energy that allowed it to replace the original Hercules blended propellant (Alliant Techsystems Inc., Hopins, Minn.) and grease-paste barrel erosion inhibitor. Use of this older ignition system created both an excessive amount of smoke and thermal obscuration (heat waves) as the projectile exited the gun tube. These effects tended to linger about the front of the vehicle, causing difficulties in seeing down range with the vehicle's sight system. Until these effects dissipated naturally, and/or were moved away from in front of the vehicle by preferable cross-wind conditions, it was difficult to see tracer images until the later portion of the round's trajectory. Thus reducing the amount of muzzle obscuration was an integral part of improving the trace visibility of the M919 during its first-third of its trajectory.

The provision of the root portion **90** being oriented more longitudinally than the deflected portion **86** is believed to have a major contribution to enhancing tracer visibility. Other aerodynamic features such as canting the entire fin blades at higher angles of attack, deflecting the entire trailing edge **72** of the fins, or using other means to induce increases in SSSR (e.g., airfoil sections and the like) were not as effective in increasing the visibility of the tracer as the exemplary fin geometry shown in FIGS. **3** and **6**. In many instances, there were degradations in trace visibility. It was demonstrated that optimizing the airflow over the fin assembly was an integral part in attaining the level of trace visibility deemed necessary to the soldier. It became necessary not to disrupt the airflow closest to the body **30** of the fin, allowing it to mix with the increased dispersion of the fuel-rich combustion trail created by the burning tracer. It is therefore theorized that improved trace visibility is related to the ability to increase the size and burning characteristics of the tracer plume through higher SSSR and optimized airflow over the M919 fin. This approach improved the trace visibility of the M919 during its middle-third of its trajectory. Therefore it is believed important that the transition region **92** be located between approximately 20 and 40 percent of the radial span of the blade, and more particularly, approximately 35 percent in the exemplary delta-blade enhanced M919 fin configuration.

Observations in both day and FLIR (night) modes found the enhanced projectile to consistently and reliably provide continuous visibility along the entire path from muzzle to target at up to the maximum effective range of the projectile. This occurred in approximately 96 percent of shots. Under similar circumstances, unenhanced projectiles were invisible through the sighting system in more than 60 percent of shots, with most of the remainder involving visibility during limited portions of the path.

For projectiles of similar size (e.g., saboted projectiles of nominal caliber between 20 mm and 50 mm, inclusive) substantially the same performance enhancements would be expected to be achieved by substantially the same modifications. For projectiles of much different caliber, performance enhancements are believed attainable with appropriately scaled modifications. By way of example, for an exemplary 120 mm APFSDS-T projectile used with NATO smoothbore tank cannons, the SSSR is lower than that of the M919. For example, an SSSR in the vicinity of 90 rps is a relatively high value at a muzzle velocity of 1670 m/s. It is theorized that a steady state spin rate of between one quarter and one third that of the M919 projectile would be effective for the 120 mm projectile. An approximation may, therefore, be made of desired SSSR as a function of caliber given the observed 25 mm and theorized 120 mm examples. Using the upper and lower limits of 340 and 420 rps for the 25 mm embodiment and splitting the difference between one quarter and a third thereof for the 120 mm embodiment, linear functions for similarly desirable lower and upper limits as a function of caliber (C) may be approximately:

$$(SSSR\text{-}340)/(C\text{-}25)=(99\text{-}SSSR)/(120\text{-}C);$$

and

$$(SSSR\text{-}420)/(C\text{-}25)=(122\text{-}SSSR)/(120\text{-}C);$$

wherein SSSR is in rps and C is in mm. Other forms of scaling and approximation may be appropriate such as scaling based upon existing SSSR, fin span, projectile mass, and the like.

In high rate of fire applications typically characteristic of smaller caliber weapons, it may be desirable to intersperse tracered rounds with untracered rounds. For example, every

n^{th} (e.g., 2^{nd}–5^{th}) round in a magazine or chain may be tracered. It may be desirable to similarly enhance the untracered rounds to maintain performance consistency with the enhanced tracered rounds fired in the same sequence.

One or more embodiments of the present invention have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention. For example, although illustrated with respect to a particular APFSDS-T projectile using a particular configuration of double ramp sabot, the principles of the invention may be applied to other fin-stabilized projectiles and to projectiles using a variety of sabots including pull-type sabots wherein the obturator is located in a relatively forward location (e.g., on a forward protuberance or flange). Accordingly, other embodiments are within the scope of the following claims.

What is claimed is:

1. An ammunition cartridge centered about a longitudinal axis, the ammunition cartridge comprising:

a case having a base and a sidewall extending from the base to a mouth of the case and bounding an interior, the case dimensioned to maintain the armor piercing projectile substantially centered along the longitudinal axis;

an armor piercing projectile having a fore portion proximate to the mouth of the case and an aft portion proximate to the base of the case, the armor piercing projectile comprising:

a body having a nose proximate the fore portion of the armor piercing projectile, a tail proximate the aft portion of the armor piercing projectile and a cylindrical pocket within the tail of the body;

a tracer positioned within the cylindrical pocket of the body; and

a plurality of stabilizing fin blades projecting from the body;

a sabot securing the projectile body to the case proximate the mouth of the case;

a propellant charge located in the case interior,

wherein the plurality of stabilizing fin blades each have a first portion extending substantially longitudinally; a second portion, outboard of the first portion and having: a first subportion extending substantially longitudinally; and a second subportion, aft of the first subportion having a first surface portion inclined relative to a longitudinal direction by an angle of between about 3.5 and about 6.0 degrees; and

whereby when the armor piercing projectile has an increased steady state spin rate the tracer visibility improves.

2. The cartridge of claim **1** wherein:

the propellant charge is of effective size to propel the armor piercing projectile from a weapon at a muzzle velocity of between 1300 and 1500 m/s.

3. The cartridge of claim **1** wherein the angle is effective to provide the armor piercing-projectile with a steady state spin rate of at least 340 rps when fired at a muzzle velocity between 1300 and 1500 m/s.

4. The cartridge of claim **1** wherein the plurality of stabilizing fin blades are formed as flat plates, subject to the inclination of the first surface portions.

5. The cartridge of claim **4** wherein the plurality of stabilizing fin blades are each triangular in planform.

6. The cartridge of claim **1** wherein the sabot is dimensioned to fire the armor piercing projectile from a barrel having a nominal caliber between 20 mm and 120 mm inclusive.

7. The cartridge of claim **6** wherein the nominal caliber is between 20 mm and 50 mm inclusive.

8. The cartridge of claim **7** wherein the nominal caliber is 25 mm.

9. An armor piercing fin-stabilize discarding sabot projectile comprising a body having a tracer positioned at an aft end thereof and wherein at least two fin blades mounted on said body are formed having:

a first portion extending substantially longitudinally;

a second portion, outboard of the first portion and having:

a first subportion extending substantially longitudinally; and

a second subportion, aft of the first subportion, and inclined relative to the first subportion by an angle of between about 3.5 and about 6.0 degrees; and

whereby when the armor piercing projectile has an increased steady state spin rate the tracer visibility improves.

10. The armor piercing fin-stabilized discarding sabot projectile of claim **9** wherein:

the projectile comprising a tail portion substantially axially aligned with the fin blades;

said tracer positioned within a cylindrical pocket formed in the tail portion of the body;

there are exactly four fin blades each with the first and second portions;

the angle is between 4.3 and 5.2 degrees;

the second subportion extends to a tip of the associated fin blade;

the second subportion has a planform area of 10–30 percent of a planform area of the fin blade; and

the first portion has a radial span of 15–30 percent of a radial span of the fin blade.

11. An armor piercing fin-stabilized discarding sabot projectile with a tracer, the armor piercing fin-stabilized discarding sabot projectile comprising;

a fore portion distal to the tracer and an aft portion proximate to the tracer, the tracer being substantially centered along a longitudinal axis;

at least two tail fin blades each having: a first portion extending substantially longitudinally along said axis; a second portion, outboard of the first portion having: a first subportion extending substantially longitudinally along said axis; and a second subportion, aft of the first subportion having a portion extending by an angle θ between about 3.5 and about 6.0 degrees relative to the longitudinal axis, effective to impart the projectile with a steady-state spin rate (SSSR) within lower and upper limits respectively defined by the equations:

$$(SSSR\text{-}340)/(C\text{-}25)=(99\text{-}SSSR)/(120\text{-}C);$$

and

$$(SSSR\text{-}420)/(C\text{-}25)=(122\text{-}SSSR)/(120\text{-}C);$$

where SSSR is in rps and C is a caliber in mm; and

whereby when the armor piercing fin-stabilized discarding sabot projectile is fired at a muzzle velocity of between 1300 and 1500 m/s; and

whereby when the armor piercing fin-stabilized discarding sabot projectile has an increased steady state spin rate the tracer visibility improves.

12. The armor piercing fin-stabilized discarding sabot projectile of claim **11** wherein:

there are exactly four fin tail blades, each fin tail blade extending by the angle θ; and

whereby the angles θ is between 4.3 and 5.2 degrees and the saboted projectile has a caliber between 13 mm and 30 mm.

13. An armor piercing fin-stabilized discarding sabot projectile with a tracer for firing from a barreled weapon of nominal 25 mm caliber wherein:

the armor piercing fin-stabilized discarding sabot projectile comprises a fore portion distal to the tracer and an aft portion proximate to the tracer, the tracer substantially centered along the longitudinal axis; and

fin blades each having: a first portion extending substantially longitudinally; a second portion, outboard of the first portion and having: a first subportion extending substantially longitudinally; and a second subportion, aft of the first subportion, and having a first surface portion inclined relative to a longitudinal direction by an angle θ of between 3.5 and 6.0 degrees are fixed to the projectile adjacent to the aft portion proximate to the tracer substantially in alignment with the longitudinal axis; and

whereby when the armor piercing fin-stabilized discarding sabot projectile is fired from the barreled weapon with a muzzle velocity the angle θ of between 3.5 and 6.0 degrees is effective to achieves a steady-state spin rate (SSSR) of at least 340 rps; and

whereby the tracer visibility is improved with the increased SSSR.

14. The projectile of claim **13** whereby:

the SSSR is between about 340 and 420 rps;

the muzzle velocity is between about 1300 and 1500 m/s; and

the projectile has a muzzle spin rate approximately greater than the SSSR but approximately lesser than an intervening peak spin rate.

* * * * *